

DesignMax DM8C

in-ceiling loudspeaker

Product Overview

With coaxial two-way drivers, the 150-watt DesignMax DM8C loudspeaker delivers powerful SPL suitable for foreground music — along with premium aesthetics that complement any commercial sound installation. The DM8C features a two-way, 8-inch woofer and a center-firing coaxial 1-inch compression driver, delivering a 52 Hz – 20 kHz frequency range. The in-ceiling DM8C is installed easily via QuickHold mounting arms.

Key Features

Combine DesignMax models to complete any design, big or small — 12 loudspeakers to mix and match, from 2-inch, low-profile models to 8-inch, high-SPL compression-driver loudspeakers and outdoor-rated options

Deliver rich lows and clear, intelligible highs with coaxial two-way drivers — no DSP or EQ required. For even better sound, combine with select Bose Professional DSPs and amplifiers to enable Bose Professional loudspeaker EQ and SmartBass processing, which expands performance and response at any listening level

Blend with any room design with elegant form factors, minimum-bezel grilles available in black or white, and removable logos

Reduce installation time with the patented QuickHold mounting system, which also reduces strain, hassle, and the chance of product damage

Install easily with industry-standard accessories — all models include Euroblock connectors; in-ceiling models include plenum-rated backcans, tile bridges, and front-access audio wiring that makes installation and troubleshooting easier

Deliver high SPL for demanding applications, including high-ceiling venues such as ballrooms, concourse, and convention centers.

Technical Specifications

SINGLE LOUDSPEAKER PERFORMANCE		
Frequency Response (-3 dB) ¹	60 – 20,000 Hz	
Frequency Range (-10 dB) ¹	52 – 20,000 Hz	
Nominal Coverage Angle (1 – 4 kHz)	135° conical	
Nominal Coverage (1 – 10 kHz)	120° conical	
	AES transducer test ⁴	Bose Professional extended-lifecycle test ⁵
Power Handling, Long-term Continuous	150 W	125 W
Power Handling, Peak	600 W	500 W
Sensitivity SPL / 1 W @ 1 m ²	91 dB	91 dB
Calculated Maximum SPL @ 1 m ³	113 dB	112 dB
Calculated Maximum SPL @ 1 m, Peak	119 dB	118 dB
Crossover	1.5 kHz (passive 2-way crossover)	
Loudspeaker EQ	Not Required, Bose Professional EQ voicing and SmartBass processing available	
Recommended High-Pass Protection	48 Hz with recommended 24 dB / octave filter	
Overload protection	Resistor-network power reduction with automatic reset	
Transformer taps	70V: 2.5, 5, 10, 20, 40, 80 W, bypass	
	100V: 5, 10, 20, 40, 80 W, bypass	

TECHNICAL DATA

DesignMax DM8C

in-ceiling loudspeaker

TRANSDUCERS	
Low Frequency	1 × 8-inch woofer (203 mm)
High Frequency	1 × 1-inch compression driver, coaxial center-firing (25 mm)
Nominal Impedance	8 Ω (transformer bypass)
PHYSICAL	
Enclosure Material	Engineered plastics front baffle with integrated steel formed backcan
Grille	Magnetically attached perforated steel, powder-coated finish, paintable, with safety-tether
Logo	Rotatable, removable
Color	White grille (RAL 9003), black grille (RAL 9005), paintable
Environmental	Indoor only
Safety Agency	UL Listed, UL 1480A, in compliance with UL 2043 for plenum-space installation, NFPA 70 & NFPA 90A, CE-compliant
Operating Temperature Range	0 °C to 50 °C (32 °F to 122 °F)
Connectors	Euroblock 6-pin connector with loop-through, front-baffle mounted. Accepts 18 AWG (0.8 mm ²) to 14 AWG (2.5 mm ²) size wire
Wire / Conduit Entry	Single top wire entry point allows for 9.5 mm (3⁄8 in) conduit
Suspension / Mounting	Three (3) QuickHold, spring-loaded long travel mounting arms plus three (3) safety cable locations
Maximum Ceiling Thickness	76 mm (3.0 in)
Cutout Size (Diameter)	349 mm (13.75 in)
Product Dimensions (Grille Diameter × Depth)	409 × 255 mm (16.1 × 10.0 in)
Backcan Dimensions (Diameter × Depth)	340 × 240 mm (13.4 × 9.5 in)
Net Weight, Loudspeaker with Grille	9.6 kg (21.1 lb)
Net Weight, Tile Bridge	1.0 kg (2.2 lb)
Shipping Weight, Single	12.7 kg (28.0 lb)
Included Accessories	Adjustable tile bridge, template
Optional Accessories	Black loudspeaker grille, rough-in pan for new construction (6-pack)
PRODUCT CODES	
White	802080-0210 DESIGNMAX DM8C SINGLE WHT
Black loudspeaker grille	A01686-0100 ASSY,KIT,GRILLE,BLK,DM8C
Rough-in pan (6-pack)	810613-0010 DESIGNMAX DM8C ROUGH-IN KIT 6 PACK

Footnotes


1. Frequency response and range measured on-axis in half-space environment with Bose Professional EQ voicing.
2. Sensitivity measured on-axis in half-space environment averaged 100 Hz – 10 kHz using recommended high-pass protection.
3. Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression.
4. AES standard 2-hour duration with IEC system noise.
5. Bose Professional extended-lifecycle test using pink noise filtered to meet IEC268-5, 6-dB crest factor, 500-hour duration.

TECHNICAL DATA


DesignMax DM8C

in-ceiling loudspeaker


On-axis Response

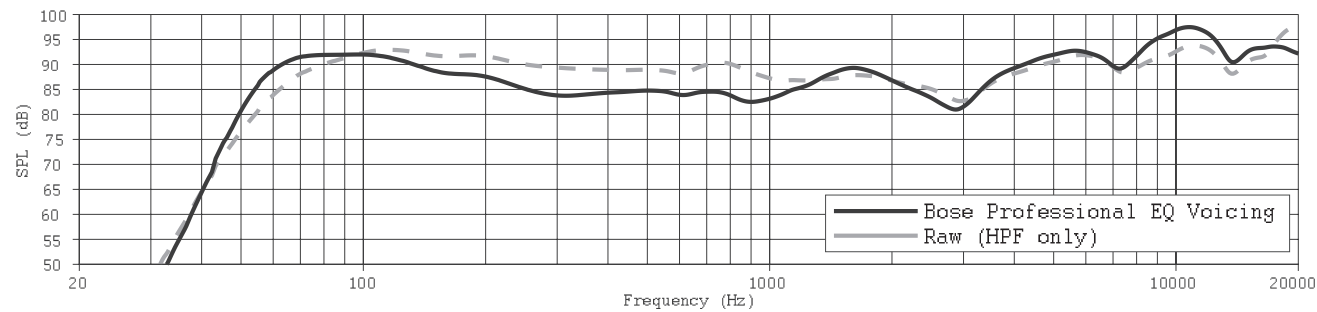

Impedance

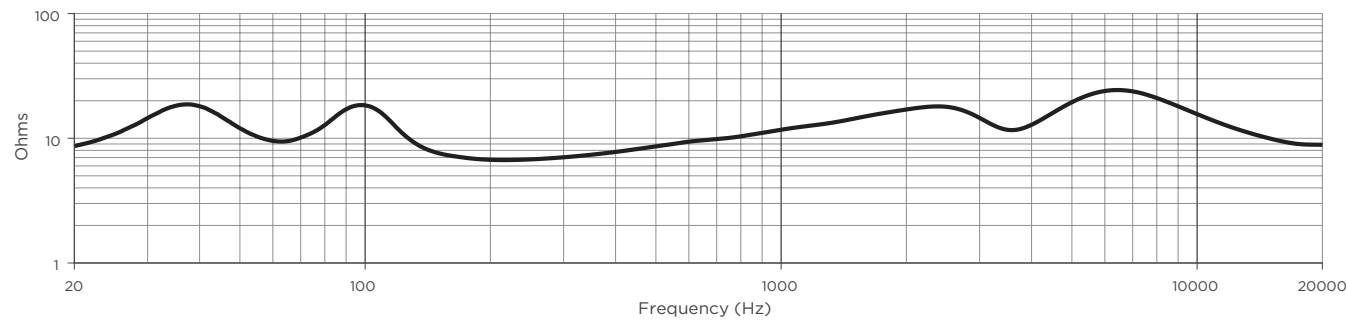

Beamwidth⁶

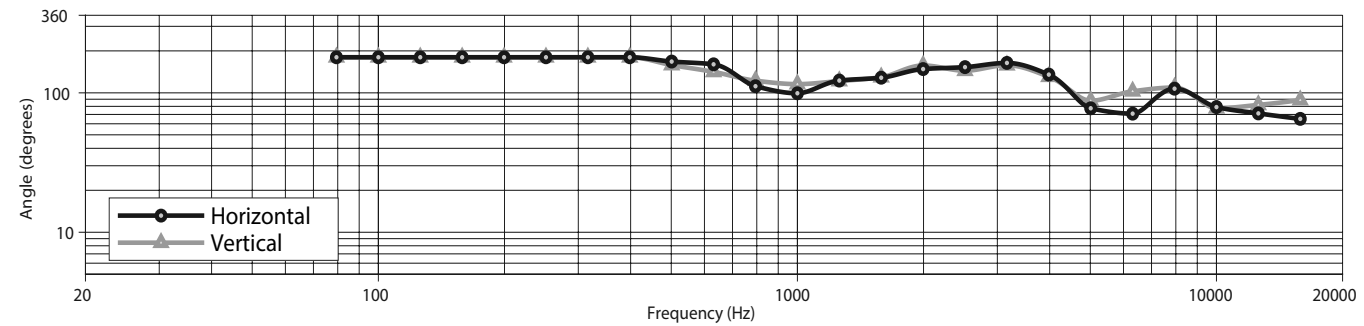


6. Measured in whole-space environment.

TECHNICAL DATA

DesignMax DM8C

in-ceiling loudspeaker

Dimensions⁷

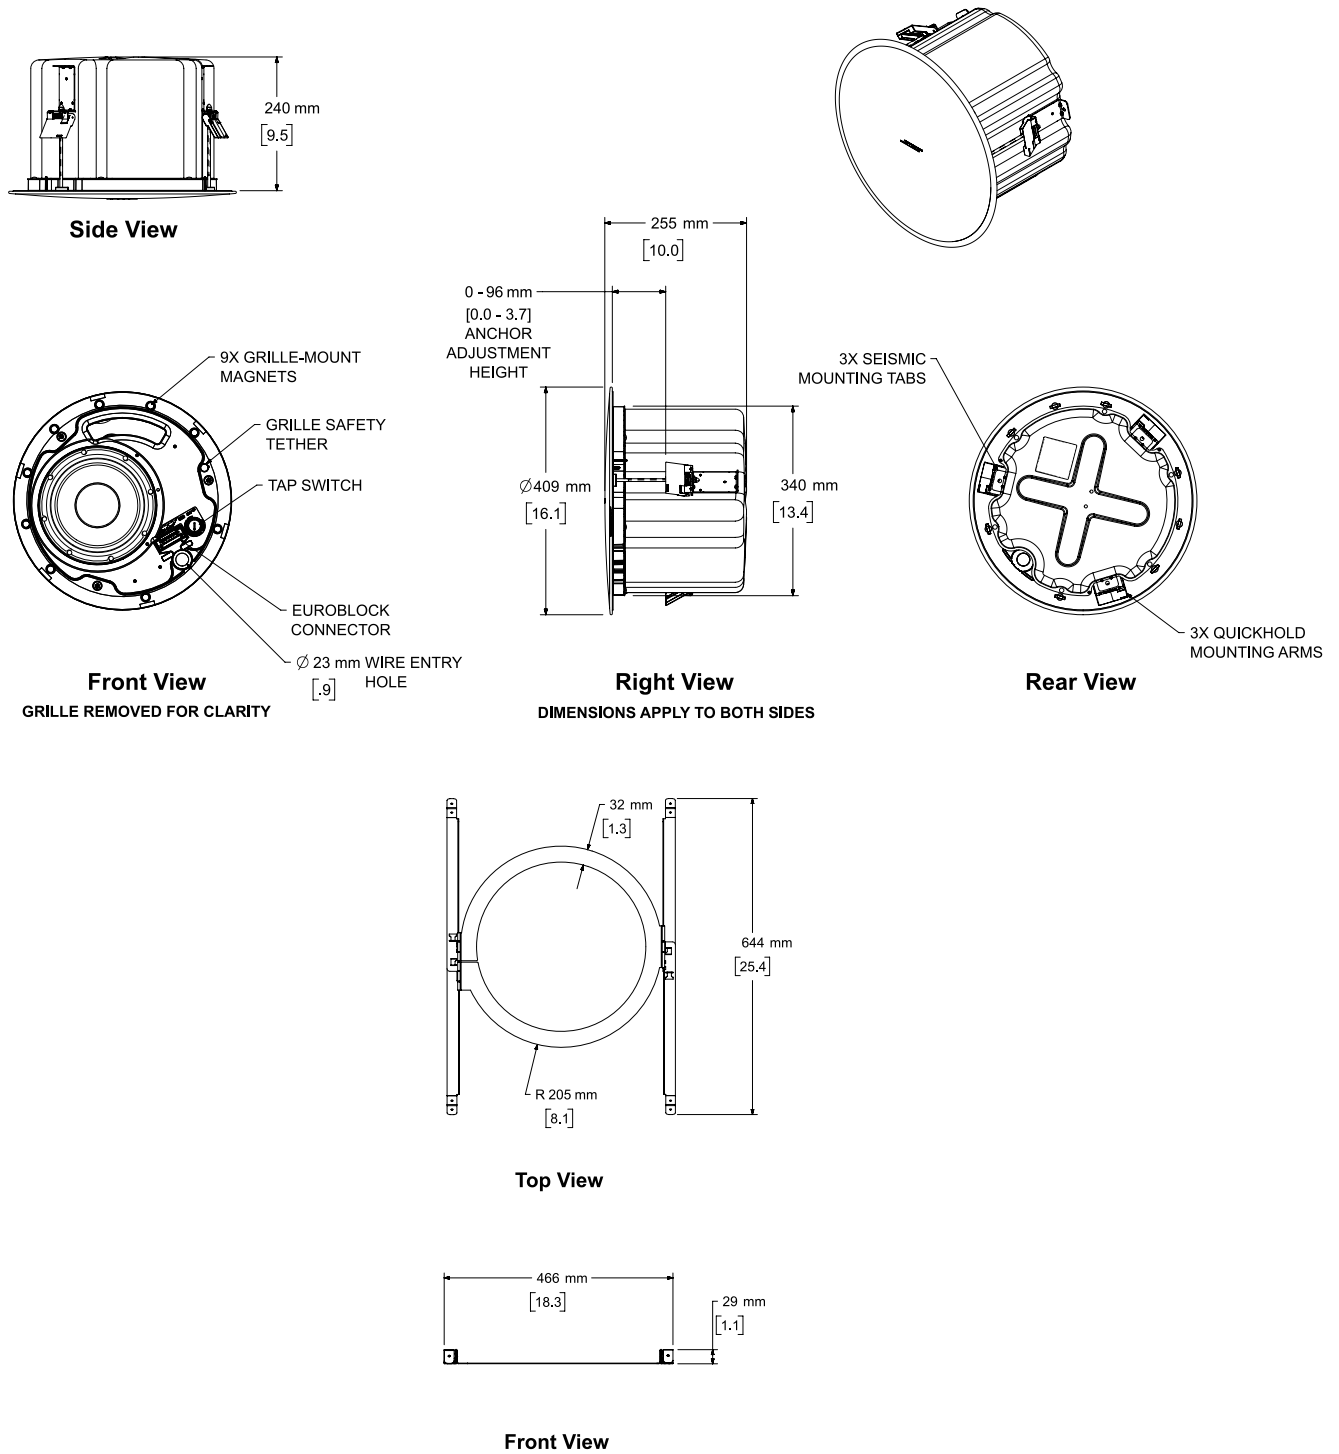

7. Dimensions are shown in millimeters over inches.

©2026 Transom Post OpCo LLC. All rights reserved. DesignMax, QuickHold, and SmartBass are trademarks of Transom Post OpCo LLC. Bose is a trademark of Bose Corporation. All other trademarks are the property of their respective owners.

For additional specifications and application information, please visit BoseProfessional.com. Specifications subject to change without notice. 05/2026